

Toptronic

EXPERT OF PD CHARGERS AND CABLES

Office: 3rd Floor, Building A4, Huimingsheng Industrial Park, Heping Community,
Fuhai Street, Bao'an District, Shenzhen 518103, China
Headquarter: No.23 Shenxi Road, Houjie Town, Dongguan 523957, China
Website: <http://www.topbrandelec.com>



SHENZHEN TOPTRONE TECHNOLOGY CO.,LTD



COMPANY PROFILE

28
Years

Founded in 1995

50
Millions

2022 Annual Revenue of Overseas Market in \$

2000+
Employees

Total number of employees

5
Group Sites

• Topbrand HK for Finance
• Toptrone Shenzhen for Marketing
• Topbrand Dongguan for production
• Topbrand Yueyang for production
• Miju Jiangxi for production

3
production bases

Covering an area of more than 210,000m²
• Dongguan: 200,000m²
• Jiangxi: 10,000m²
• Yueyang: 17,000m²

- Founded in 1995, Topbrand Electronics Group has over 28 years' experience of R&D and production of consumer electronics accessories.

- Products portfolio covers Audio & Video cables, Charge & Sync cables, USB Car & Wall chargers for IT peripherals and mobilities.

- We aim to be your trust-worthy provider and partner since inception and provide various value-added service.

- We constantly invest to strengthen our advantages in the R&D and manufacture, and benefit our customers. After decades' development, we have employees 2500+, production base over 200,000 sqm totally in Dongguan, Yueyang and Ji'an city of China. Deployed complete industry-chain, hardware / plastic / tooling all produced in-house

- We focus to keep improving our management. We have been ISO9001 certified earlier in 2004, and IATF16949 certified in 2014. BSCI certified in 2015, and ISO13485 in 2019. SCAN certified in 2023

- we keep our pace with the up-to-date technologies: got UL certified in 2009, and ETL certified in 2019. all products are designed and produced under the standard of CE/FCC/UL/ETL/SAA/C-TICK/CCC/ROHS/REACH...

- Established long-term business with worldwide partners, say Google / Huawei / Foxconn / Samsung / Honeywell / Belkin / Nomad / ALOGIC and more, we strive for zero customer complaints, we are always on the way.

Partners

Toptrone

We are offering the systematic and high quality products and solutions to our customers, with unique advantages in OEM/ODM. A long-term partner with more global brands to below as well:

MUJI
無印良品

NOMAD

Google

CRESTRON

NATIVE UNION

NITORI

Nitori Co., Ltd.

comsol

Meta

Amphenol

belkin

Certification&qualification

Toptrone

We keep to improve our quality management, up to now, we are ISO9001 & ISO14001 & ISO13485 & IATF16949 certified. All of our Chargers are fully certified with say UL & ETL & FCC & DoE VI & CEC & CE & UKCA & PSE & RoHS & REACH. Besides, we are also BSCI and SCAN certified to take our responsibility to the earth community.



Shenzhen Toptrone Technology Co., Ltd.





TEST REPORT



Factory Overview

Toptrone



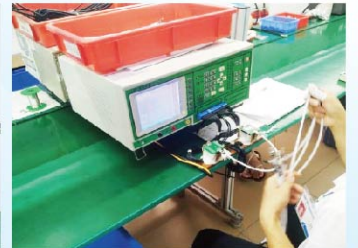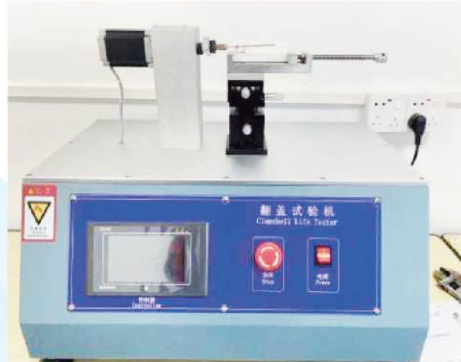

PD CHARGER SERIES

Economic Series

Toptronic



PD20W C

INPUT: 100-240V~ 50/60Hz

OUTPUT: 5V/3A, 9V/2.22A, 12V/1.67A

- PPS/QC3.0 compatible
- Compact Size: 43*40*29mm (exclude plug)



PD30W C

INPUT: 100-240V~ 50/60Hz

OUTPUT: 5V/3A, 9V/3A, 12V/2.5A,
15V/2A, 20V/1.5A


- PPS/QC3.0 compatible
- Compact Size: 43*40*29mm (exclude plug)

**PD20W A+C****INPUT:** 100-240V~ 50/60Hz**OUTPUT:** USB C: 5V/3A, 9V/2.22A, 12V/1.67A
USB A: QC3.0 18W
USB C+A: 5V/3A Max

- PPS / QC3.0 compatible
- Ultra Mini Size: 43*40*29mm (exclude plug)

**PD30W A+C****INPUT:** 100-240V~ 50/60Hz**OUTPUT:** USB C: 5V/3A, 9V/3A, 12V/2.5A,
15V/2A, 20V/1.5A
USB A: QC3.0 18W
USB C+A: 5V/3A Max

- PPS / QC3.0 compatible
- Ultra Mini Size: 43*40*29mm (exclude plug)

**PD20W C****INPUT:** 100-240V~ 50/60Hz**OUTPUT:** 5V/3A, 9V/2.22A, 12V/1.67A

- PPS/QC3.0 compatible
- Ultra Mini Size: 32*31*30.7mm(exclude plug)

**PD30W C****INPUT:** 100-240V~ 50/60Hz, 0.6A Max**OUTPUT:** 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A

- PPS/QC3.0 compatible
- GaN Technology empowered
- Ultra Mini Size: 32*31*30.7mm(exclude plug)

**PD20W A+C****INPUT:** 100–240V~ 50/60Hz


OUTPUT: USB C: 5V/3A, 9V/2.22A, 12V/1.67A
 USB A: QC3.0 18W
 USB C+A: 5V/3A Max

- PPS/QC3.0 compatible
- Ultra Mini Size: 32*31*30.7mm(exclude plug)

**PD30W A+C****INPUT:** 100–240V~ 50/60Hz

OUTPUT: USB C: 5V/3A, 9V/3A, 12V/2.5A,
 15V/2A, 20V/1.5A
 USB A: QC3.0 18W
 USB C+A: 5V/3A Max

- PPS/QC3.0 compatible
- GaN Technology Empowered
- Ultra Mini Size: 32*31*30.7mm (exclude plug)

**PD20W C****INPUT:** 100–240V~ 50/60Hz**OUTPUT:** 5V/3A, 9V/2.22A, 12V/1.67A

- PPS / QC3.0 compatible
- Ultra Mini Size: 29.5*29.5*30.5mm (exclude plug)

**PD30W C****INPUT:** 100–240V~ 50/60Hz

OUTPUT: 5V/3A, 9V/3A, 12V/2.5A,
 15V/2A, 20V/1.5A

- PPS / QC3.0 compatible
- GaN Technology Empowered
- Ultra Mini Size: 29.5*29.5*30.5mm (exclude plug)

**PD45W 2C****INPUT:** 100~240V~50/60Hz**OUTPUT:** USB C1 or C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A
USB C1+C2: PD20W+PD20W
(or PD30W+PD15W optional)

- PPS/QC3.0 compatible
- GaN Technology Empowered
- Compact Size: 37.9*36.9*36.9mm (exclude plug)

**PD65W 2C****INPUT:** 100~240V~50/60Hz**OUTPUT:** USB C1 or C2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A
USB C1+C2: PD45W+PD20W

- PPS/QC3.0 compatible
- GaN Technology Empowered
- Compact Size: 42*38*39.5mm (exclude plug)

**PD30W C****INPUT:** 100~240V~ 50/60Hz**OUTPUT:** 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A

- PPS/QC3.0 compatible
- GaN technology empowered
- Ultra Mini Size: 45.3*40.9*30.8mm(exclude plug)

**PD30W A+C****INPUT:** 100~240V~ 50/60Hz**OUTPUT:** USB C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
USB A: QC3.0 18W
USB C+A: PD20W+5V/2A Max


- PPS/QC3.0 compatible
- GaN technology empowered
- Ultra Mini Size: 45.3*40.9*30.8mm(exclude plug)

**PD35W C****INPUT:** 100~240V~ 50/60Hz**OUTPUT:** 5V/3A, 9V/3A, 12V/2.92A,
15V/2.33A, 20V/1.75A

- PPS/QC3.0 compatible
- GaN technology empowered
- Ultra Mini Size: 45.3*40.9*30.8mm (exclude plug)

**PD35W 2C****INPUT:** 100~240V~ 50/60Hz**OUTPUT:** USB C1 or C2: 5V/3A, 9V/3A, 12V/2.92A,
15V/2.33A, 20V/1.75A
USB C1+C2: Total 35W Max

- PPS/QC3.0 compatible
- GaN technology empowered
- Dynamic Power Allocation Technology
- Ultra Mini Size: 45.3*40.9*30.8mm (exclude plug)

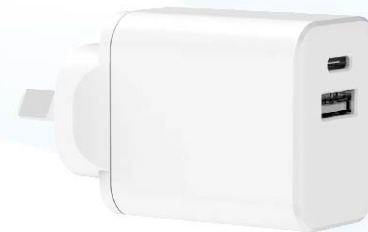**PD35W A+C****INPUT:** 100~240V~ 50/60Hz**OUTPUT:** USB C: 5V/3A, 9V/3A, 12V/2.92A,
15V/2.33A, 20V/1.75A
USB A: QC3.0 18W
USB C+A: 5V/4A Max

- PPS/QC3.0 compatible
- GaN technology empowered
- Ultra Mini Size: 45.3*40.9*30.8mm(exclude plug)

**PD45W C****INPUT:** 100 ~240V~50/60Hz**OUTPUT:** 5V/3A, 9V/3A, 12V/3A,
15V/3A, 20V/2.25A

- PPS/QC3.0 compatible
- GaN Technology adopted
- Ultra Mini Size: 45.3*40.9*30.8mm (exclude plug)

**PD45W 2C****INPUT:** 100-240V~50/60Hz

OUTPUT: USB C1 or C2: 5V/3A, 9V/3A, 12V/3A,
15V/3A, 20V/2.25A
USB C1+C2: PD20W+PD20W
(or PD27W+PD18W optional)

- PPS/QC3.0 compatible
- GaN technology empowered
- Ultra Mini Size: 45.3*40.9*30.8mm (exclude plug)

**PD45W A+C****INPUT:** 100-240V~50/60Hz

OUTPUT: USB C: 5V/3A, 9V/3A, 12V/3A,
15V/3A, 20V/2.25A
USB A: QC3.0 18W
USB C+A: PD30W+5V/2.4A

- PPS/QC3.0 compatible
- GaN Technology adopted
- Ultra Mini Size: 45.3*40.9*30.8mm (exclude plug)

**PD65W C****INPUT:** 100-240V~50/60Hz

OUTPUT: 5V/3A, 9V/3A, 12V/3A,
15V/3A, 20V/3.25A

- PPS/QC3.0 compatible
- GaN Technology empowered
- Ultra Mini Size: 45.3*40.9*30.8mm (exclude plug)

**PD65W 2C****INPUT:** 100-240V~50/60Hz

OUTPUT: USB C1 or C2: 5V/3A, 9V/3A,
12V/3A, 15V/3A, 20V/3.25A
USB C1+C2: PD45W+PD20W

- GaN Technology empowered
- Compact Size: 55*53*34mm (exclude plug)

**PD65W A+C****INPUT:** 100–240V~50/60Hz

OUTPUT: USB C: 5V/3A, 9V/3A, 12V/3A,
15V/3A, 20V/3.25A
USB A: QC3.0 18W
USB C+A: PD45W+QC3.0 18W

- PPS/QC3.0 compatible
- GaN Technology empowered
- Compact Size: 55*53*34mm (exclude plug)

**PD65W 2C+A****INPUT:** 100–240V~50/60Hz

OUTPUT: USB C1: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A
USB C2: 5V/3A, 9V/2.22A, 12V/1.67A
USB A: QC3.0 18W
USB C1+C2: PD45W+PD20W
USB C1+A: PD45W+QC3.0 18W
USB C2+A: 5V/3A Max
USB C1+C2+A: PD45W+5V/3A Max

- PPS/QC3.0 compatible
- GaN Technology empowered
- Compact Size: 55*53*34mm (exclude plug)

**PD3.1 140W 3C****INPUT:** 100–240V~50/60Hz

OUTPUT: USB C1 or C2 or C3: PD3.1 5V/3A,
9V/3A, 12V/3A, 15V/3A, 20V/5A, 28V/5A
USB C1+C2 or C1+C3 or C2+C3: PD100W+PD30W
USB C1+C2+C3: PD65W+PD30W+PD30W

- PPS/AVS/QC3.0 compatible
- GaN Technology empowered
- Size: 75*74*32.4mm (exclude plug)

**PD3.1 140W 4C Desktop****INPUT:** 100–240V~50/60Hz

OUTPUT: USB C1 or C2 or C3 or C4: PD3.1 5V/3A,
9V/3A, 12V/3A, 15V/3A, 20V/5A, 28V/5A

- PPS/AVS/QC3.0 compatible
- GaN technology empowered
- Size: 84*70*33mm

PD67W C**INPUT :** 100–240V~50/60Hz**OUTPUT:** 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.35A

- PPS/QC3.0 compatible
- GaN Technology empowered
- Compact Size: 57*52.7*30.6mm (exclude plug)

**PD67W 2C****INPUT :** 100–240V~50/60Hz

OUTPUT: USB C1 or C2: 5V/3A,9V/3A,12V/3A,
15V/3A,20V/3.35A
USB C1+C2: PD47W+PD20W

- PPS/QC3.0 compatible
- GaN Technology empowered
- Compact Size: 57*52.7*30.6mm (exclude plug)

**PD67W A+C****INPUT :** 100–240V~50/60Hz

OUTPUT: USB C: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.35A
USB A: QC3.0 18W
USB C+A: PD47W+QC3.0 18W

- PPS/QC3.0 compatible
- GaN Technology empowered
- Ultra Mini Size: 32*31*30.7mm(exclude plug)

**PD67W A+2C****INPUT :** 100–240V~50/60Hz

OUTPUT: USB C1: PD67W (5V/3A,9V/3A,12V/3A,15V/3A,20V/3.35A)
USB C2: PD20W (5V/3A, 9V/2.22A,12V/1.67A)
USB A: QC3.0 18W USB C1+C2: PD47W+PD20W
USB C1+A: PD47W+QC3.0 18W USB C2+A: 5V/3A Max
USB C1+C2+A: PD47W+5V/3A Max

- PPS/QC3.0 compatible
- GaN Technology empowered
- Compact Size: 57*52.7*30.6mm (exclude plug)



**PD100W C**

INPUT: 100 –240V~50/60Hz

OUTPUT: 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A

- PPS/QC3.0 compatible
- GaN Technology empowered
- Compact Size: 70*69*30mm (exclude plug)

**PD100W 2C**

INPUT: 100 –240V~50/60Hz

OUTPUT: USB C1 or C2: 5V/3A,9V/3A,12V/3A,
15V/3A, 20V/5A
USB C1+C2: PD65W+PD30W

- PPS/QC3.0 compatible
- GaN Technology empowered
- Compact Size: 70*69*30mm (exclude plug)

**PD100W 2C+A**

INPUT: 100–240V~50/60Hz

OUTPUT: USB C1 or C2: 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A
USB A: QC3.0 18W
USB C1+C2 : PD65W+PD30W
USB C1+A or C2+A: PD70W+QC3.0 18W
USB C1+C2+A: PD45W+PD30W+QC3.0 18W

- PPS/QC3.0 compatible
- GaN Technology empowered
- Compact Size: 70*69*30mm (exclude plug)

**PD100W 3C**

INPUT: 100 –240V~50/60Hz

OUTPUT: USB C1 or C2 or C3 : 5V/3A,9V/3A,
12V/3A,15V/3A, 20V/5A
USB C1+C2 (or C1+C3 or C2+C3) :
PD65W+PD30W
USB C1+C2+C3: PD45W+PD30W+PD20W

- PPS/QC3.0 compatible
- GaN Technology empowered
- Compact Size: 70*69*30mm (exclude plug)

**PD35W 2C****INPUT:** 100–240V~ 50/60Hz


OUTPUT: USB C1 or C2: 5V/3A, 9V/3A, 12V/2.92A,
15V/2.33A, 20V/1.75A
USB C1+C2: Total 35W Max

- Dynamic Power Allocation technology
- PPS/QC3.0 compatible
- GaN technology empowered
- Ultra Mini Size: 45.3*40.9*30.8mm (exclude plug)

**PD40W 2C****INPUT:** 100–240V~ 50/60Hz

OUTPUT: USB C1 or C2: 5V/3A, 9V/3A,
12V/3A, 15V/2.67A, 20V/2A
USB C1+C2: PD20W+PD20W

- Dynamic Power Allocation technology
- GaN technology empowered
- Ultra Mini Size: 52.5*40.5*29.2mm(exclude plug)

**PD35W 2C****INPUT:** 100–240V~ 50/60Hz, 0.9A Max

OUTPUT: USB C1 or C2: 5V/3A, 9V/3A,
12V/2.92A, 15V/2.33A, 20V/1.75A
USB C1+C2: Total 35W Max

- Dynamic Power Allocation technology
- PPS/QC3.0 compatible
- GaN technology empowered
- Ultra Mini Size: 40*40*29mm(exclude plug)

**PD70W 2C****INPUT:** 100–240V~50/60Hz

OUTPUT: USB C1 or C2: 5V/3A, 9V/3A,
12V/3A, 15V/3A, 20V/3.5A
USB C1+C2: Total 70W Max

- Dynamic Power Allocation technology
- PPS/QC3.0 compatible
- GaN Technology empowered
- Compact Size: 57*52.7*30.6mm (exclude plug)



2-IN-1 PD WALL CHARGER

INPUT: 100-240V~50/60Hz

OUTPUT: USB C: PD20W
USB A: QC3.0 18W
USB C+A: 5V/3A Max

- Built-in high quality battery 5000mAh
- PPS/QC3.0 compatible
- Ultra Mini Size: 78*71*33mm(exclude plug)



2-IN-1 PD WALL CHARGER

INPUT: 100-240V~50/60Hz

OUTPUT: USB C: PD20W
USB A: QC3.0 18W
USB C+A: 5V/3A Max

- Built-in high quality battery 10000mAh
- PPS/QC3.0 compatible
- Ultra Mini Size: 87*78*33mm(exclude plug)



5-IN-1 PD WALL CHARGER

INPUT: 100-240V~50/60Hz

OUTPUT: USB C: PD20W
USB A: QC3.0 18W
USB C+A: 5V/3A Max

- Built-in high quality battery 10000mAh
- Integrated wireless charging 15W Max
- Integrated USB-C and Lightning Cable
- LED display to indicate battery capacity balance
- Compact Size: 86*86*32.5mm(exclude plug)



PD Wall Charger For iPhone 15 Series

Toptrone



PD20W C

INPUT: 100–240V~ 50/60Hz

OUTPUT: 5V/3A, 9V/2.22A, 12V/1.67A


(PD30W Or Other Models Available)

- PPS/QC3.0 compatible
- Compact Size: 42.7*40*27.8mm (exclude plug)



PD Wall Charger For iPhone 15 Series

Toptrone



PD20W A+C

INPUT: 100–240V~ 50/60Hz

OUTPUT: USB C: 5V/3A, 9V/2.22A, 12V/1.67A

USB A: QC3.0 18W

USB C+A: 5V/3A Max

(PD30W Or Other Models Available)

- PPS / QC3.0 compatible
- Ultra Mini Size: 42.7*40*27.8mm (exclude plug)



CAR CHARGER SERIES

Mini Car Charger Series

Toptronic

PD20W C

INPUT : 12-24V DC

OUTPUT: USB-C: 5V/3A, 9V/2.22A, 12V/1.67A

TOTAL: 20W

- Housing Material: PC
- Size: 43 * 25mm



PD20W A+C

INPUT : 12-24V DC

OUTPUT: USB-C: 5V/3A, 9V/2.22A, 12V/1.67A

USB-A: QC3.0 18W USB-C+A: 5V/3A Max

TOTAL: 20W

- Housing Material: PC
- Size: 43 * 25mm



PD30W C

INPUT : 12-24V DC

OUTPUT: USB-C: 5V/3A,9V/3A,12V/2.5A,15V/2A,20V/1.5A

TOTAL: 30W

- Housing Material: PC
- Size: 43 * 25mm

**PD30W A+C**

INPUT : 12-24V DC

OUTPUT: USB-C: 5V/3A,9V/3A, 12V/2.5A

USB-A: QC3.0 18W

USB-C+A: 5V/3A Max

TOTAL: 30W

- Housing Material: PC
- Size: 43 * 25mm

**PD20W C**

INPUT : 12-24V DC

OUTPUT: USB-C: 5V/3A,9V/2.22A,
12V/1.67A

TOTAL: 20W

- Housing Material: PC
- Size: 52.4* 25.8mm

**PD20W A+C**

INPUT : 12-24V DC

OUTPUT: USB-C: 5V/3A, 9V/2.22A,
12V/1.67A
USB-A: QC3.0 18W
USB-C+A: 5V/3A Max

TOTAL: 20W

- Housing Material: PC
- Size: 52.4* 25.8mm

**PD30W C**

INPUT : 12-24V DC

OUTPUT: USB-C: 5V/3A,9V/3A,
12V/2.5A,15V/2A,
20V/1.5A

TOTAL: 30W

- Housing Material: PC
- Size: 52.4* 25.8mm



PD30W A+C

INPUT: 12-24V DC

OUTPUT: USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
USB-A: QC3.0 18W
USB-C+A: 5V/3A Max

TOTAL: 30W

- Housing Material: PC
- Size: 54*25.8mm



PD30W A+C

INPUT: 12-24V DC

OUTPUT: USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
USB-A: QC3.0 18W
USB-C+A: 5V/3A Max

TOTAL: 30W

- Housing Material: PC
- Size: 54.4*26.9mm



PD20W A+C

INPUT: 12-24V DC

OUTPUT: USB-C: 5V/3A, 9V/2.22A, 12V/1.67A
USB-A: 5V/2.4A
USB-C+A: PD20W+5V/2.4A

TOTAL: 32W

- Housing Material: PC (body) + Aluminum Alloy (Ring)
- Size: 68.7*32.4mm

PD20W A+C

INPUT: 12-24V DC

OUTPUT: USB-C: 5V/3A, 9V/2.22A, 12V/1.67A
USB-A: QC3.0 18W
USB-C+A: PD20W+QC3.0 18W

TOTAL: 38W

- Housing Material: PC (body) + Aluminum Alloy (Ring)
- Size: 68.7*32.4mm



PD30W A+C

INPUT: 12-24V DC

OUTPUT: USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
USB-A: 5V/2.4A
USB-C+A: PD30W+5V/2.4A

TOTAL: 42W

- Housing Material: PC (body) + Aluminum Alloy (Ring)
- Size: 68.7*32.4mm



PD30W A+C

INPUT : 12-24V DC

OUTPUT: USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
 USB-A: QC3.0 18W
 USB-C+A: PD30W+QC3.0 18W

TOTAL: 48W

- Housing Material: PC (body) + Aluminum Alloy (Ring)
- Size: 68.7*32.4mm

**PD20W+PD20W**

INPUT : 12-24V DC

OUTPUT: USB-C1: 5V/3A, 9V/2.22A, 12V/1.67A
 USB-C2: 5V/3A, 9V/2.22A, 12V/1.67A
 USB-C1+C2: PD20W+PD20W

TOTAL: 40W

- Housing Material: PC (body) + Aluminum Alloy (Ring)
- Size: 68.7*32.4mm

**PD20W + PD30W**

INPUT : 12-24V DC

OUTPUT: USB-C1: 5V/3A, 9V/2.22A, 12V/1.67A
 USB-C2: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
 USB-C1+C2: PD20W+PD30W

TOTAL: 50W

- Housing Material: PC (body) + Aluminum Alloy (Ring)
- Size: 68.7*32.4mm

**PD30W + PD30W**

INPUT : 12-24V DC

OUTPUT: USB-C1: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
 USB-C2: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
 USB-C1+C2: PD30W+PD30W

TOTAL: 60W

- Housing Material: PC (body) + Aluminum Alloy (Ring)
- Size: 68.7*32.4mm



CABLE SERIES

Economic Cable Series

Toptrone



USB-A To Lightning

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 2.4A current supported
- MFI C189 chipset built-in
- Color: Customized

Made for
iPhone | iPad | iPod



USB-C To Lightning

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported
- MFI C94 chipset built-in
- Color: Customized

Made for
iPhone | iPad | iPod



USB-A To USB-C

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported;
- Color: Customized



USB-C To USB-C

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported
- Color: Customized



USB-A To Lightning

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 2.4A current supported
- MFi C189 chipset built-in
- Color: Customized
- Aluminum housing & Nylon braided sleeve


Made for
iPhone | iPad | iPod



USB-C To Lightning


- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported
- MFi C94 chipset built-in
- Color: Customized
- Aluminum housing & Nylon braided sleeve

Made for
iPhone | iPad | iPod



USB-A To USB-C

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported;
- Color: Customized
- Aluminum housing & Nylon braided sleeve



USB-C To USB-C

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported
- Color: Customized
- Aluminum housing & Nylon braided sleeve



3-in-1 Charge & Sync Cable

USB-C&A To USB-C&Lightning


- Length: 1m/1.2m
- USB2.0 480Mbps
- supported 2.4A and 3A current
- Color: Customized



2-in-1 Charge & Sync Cable

USB-C To USB-C&Lightning

- Length: 1m/1.2m
- USB2.0 480Mbps
- supported 3A current
- Color: Customized

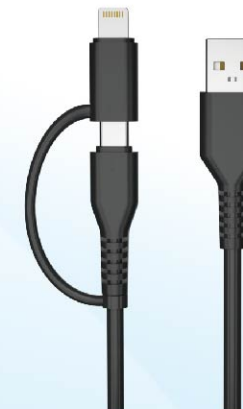

2-in-1 Charge & Sync Cable

USB-A To USB-C&Lightning

- Length: 1m/1.2m
- USB2.0 480Mbps
- supported 3A and 2.4A current
- Color: Customized

**2-in-1 Charge & Sync Cable**

USB-C To USB-C & USB-A

- Length: 1m/1.2m
- USB2.0 480Mbps
- supported 3A current
- Color: Customized

**5-in-1 Charge & Sync Cable**

USB-C & USB-A To Micro USB & USB-C & Lightning

- Length: 1m/1.2m
- USB2.0 480Mbps (Only for Lightning)
- supported 3A and 2.4A current
- Color: Customized

**USB-A To Lightning**

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 2.4A current supported
- MFi C189 chipset built-in
- Color: Customized

Made for
iPhone | iPad | iPod

**USB-C To Lightning**

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported
- MFi C94 chipset built-in
- Color: Customized

Made for
iPhone | iPad | iPod

**USB-A To USB-C**

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported;
- Color: Customized

**USB-C To USB-C**

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported
- Color: Customized



USB-A To Lightning

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 2.4A current supported
- MFi C189 chipset built-in
- Color: Customized
- Aluminum housing & Nylon braided sleeve
- Straight to 90 degree right angled

Made for
iPhone | iPad | iPod



USB-C To Lightning

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported
- MFi C94 chipset built-in
- Color: Customized
- Aluminum housing & Nylon braided sleeve
- Straight to 90 degree right angled

Made for
iPhone | iPad | iPod



USB-A To USB-C

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported;
- Color: Customized
- Aluminum housing & Nylon braided sleeve
- Straight to 90 degree right angled



USB-C To USB-C

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported
- Color: Customized
- Aluminum housing & Nylon braided sleeve
- Straight to 90 degree right angled



USB-C To USB-C Cable

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported
- Color: Customized
- Transparent Tips
- LED indicator



USB-C To USB-C Cable

- Length: 1m/1.2m/1.5m/2m/3m
- USB2.0 480Mbps data transmission speed
- 3A current supported
- Color: Customized
- ABS housing and same fabric braided sleeve
- as Apple original